

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 155 465 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
03.07.2002 Bulletin 2002/27

(51) Int Cl.7: **H01M 4/92, H01M 8/10,
B01J 23/40, B01J 23/56**

(21) Application number: **99959519.2**

(86) International application number:
PCT/GB99/04081

(22) Date of filing: **09.12.1999**

(87) International publication number:
WO 00/35037 (15.06.2000 Gazette 2000/24)

(54) ELECTRODE STRUCTURE

ELEKTRODENSTRUKTUR

STRUCTURE D'ELECTRODE

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

(30) Priority: **09.12.1998 GB 9826940**

(43) Date of publication of application:
21.11.2001 Bulletin 2001/47

(73) Proprietor: **JOHNSON MATTHEY PUBLIC
LIMITED COMPANY**
London SW1Y 5BQ (GB)

(72) Inventors:

- **Cooper, Susan Joy**
Reading RG1 5LZ (GB)
- **Hoogers, Gregor, Fachhochschule Trier**
55761 Birkenfeld (DE)

(74) Representative: **Wishart, Ian Carmichael et al**
Patents Department
Johnson Matthey Technology Centre
Blount's Court
Sonning Common
Reading, RG4 9NH (GB)

(56) References cited:
EP-A- 0 736 921 EP-A- 0 838 872

- **GOTZ M ET AL: "Binary and ternary anode catalyst formulations including the elements W, Sn and Mo for PEMFCs operated on methanol or reformat gas" ELECTROCHIMICA ACTA,GB,ELSEVIER SCIENCE PUBLISHERS, BARKING, vol. 43, no. 24, 21 August 1998 (1998-08-21), pages 3637-3644, XP004132402 ISSN: 0013-4686**
- **PATENT ABSTRACTS OF JAPAN vol. 017, no. 511 (E-1432), 14 September 1993 (1993-09-14) & JP 05 135772 A (FUJI ELECTRIC CO LTD), 1 June 1993 (1993-06-01) - & DATABASE WPI Section Ch, Week 199326 Derwent Publications Ltd., London, GB; Class L03, AN 1993-209759 XP002133323 & JP 05 135772 A (FUJI ELECTRIC MFG CO LTD), 1 June 1993 (1993-06-01)**
- **A ET AL: "Precious metal/hydrogen bronze anode catalysts for the oxidation of small organic molecules and impure hydrogen" JOURNAL OF POWER SOURCES,CH,ELSEVIER SEQUOIA S.A. LAUSANNE, vol. 61, no. 1-2, 8 July 1996 (1996-07-08), pages 223-225, XP004071514 ISSN: 0378-7753**
- **L. W. NIEDRACH AND I. B. WEINSTOCK: "Performance of carbon monoxide in Low-temperature fuel cells containing oxide catalysts" ELECTROCHEMICAL TECHNOLOGY, vol. 3, no. 9-10, September 1965 (1965-09), page 270-275 XP002133322 cited in the application**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 155 465 B1

Description

[0001] The invention relates to an improved electrode structure and specifically to a poison-tolerant anode structure for fuel cells, suitable for use in particular in proton exchange membrane fuel cells. The invention further relates to an anode, a catalysed membrane, a membrane electrode assembly and a fuel cell comprising said electrode structure.

[0002] Electrochemical cells invariably comprise at their fundamental level a solid or liquid electrolyte and two electrodes, the anode and cathode, at which the desired electrochemical reactions take place. A fuel cell is an energy conversion device that efficiently converts the stored energy of its fuel into electrical energy by combining hydrogen, stored as a gas, or methanol, stored as a liquid or gas, with oxygen to generate electrical power. The hydrogen or methanol is oxidised at the anode and oxygen reduced at the cathode. In these cells gaseous reactants and/or products have to be diffused into and/or out of the cell electrode structures. The electrodes therefore are specifically designed to be porous to gas diffusion in order to optimise the contact between the reactants and the reaction sites in the electrode to maximise the reaction rate. An electrolyte is required which is in contact with both electrodes and which may be alkaline or acidic, liquid or solid. In a solid polymer fuel cell (SPFC), also known as a proton-exchange membrane fuel cell (PEMFC), the electrolyte is a solid proton-conducting polymer membrane, commonly based on perfluorosulphonic acid materials. These electrolytes must be maintained in a hydrated form during operation in order to prevent loss of ionic conduction through the electrolyte; this limits the operating temperature of the PEMFC to between 70°C and 120°C, depending on the operating pressure. The PEMFC does, however, provide much higher power density output than the other fuel cell types, and can operate efficiently at much lower temperatures. Because of this, it is envisaged that the PEMFC will find use in vehicular power generation and small-scale residential power generation applications. In particular, vehicle zero-emission regulations have been passed in areas of the United States that are likely to restrict the use of the combustion engine in the future. Pre-commercial PEMFC-powered buses and prototype PEMFC-powered vehicles are now being demonstrated for these applications.

[0003] Due to the relatively low operating temperatures of these systems, the oxidation and reduction reactions require the use of catalysts in order to proceed at useful rates. Catalysts, which promote the rates of electrochemical reactions, such as oxygen reduction and hydrogen oxidation in a fuel cell, are often referred to as electrocatalysts. Precious metals, in particular platinum, have been found to be the most efficient and stable electrocatalysts for all low-temperature fuel cells operating below 300°C. The platinum electrocatalyst is provided as very small particles (~20-50Å) of high surface area, which are often, but not always, distributed on and supported by larger macroscopic conducting carbon particles to provide a desired catalyst loading. Conducting carbons are the preferred materials to support the catalyst.

[0004] In the PEMFC the combined laminate unit formed from the membrane and the two electrodes is known as a membrane electrode assembly (MEA). The MEA will typically comprise several layers, but can in general be considered, at its basic level, to have five layers, which are defined principally by their function. On either side of the membrane an anode and cathode electrocatalyst is incorporated to increase the rates of the desired electrode reactions. In contact with the electrocatalyst containing layers, on the opposite face to that in contact with the membrane, are the anode and cathode gas diffusion substrate layers. The anode gas diffusion substrate is designed to be porous and to allow the reactant hydrogen or methanol to enter from the face of the substrate exposed to the reactant fuel supply, and then to diffuse through the thickness of the substrate to the layer which contains the electrocatalyst, usually platinum metal based, to maximise the electrochemical oxidation of hydrogen or methanol. The anode electrocatalyst layer is also designed to comprise some level of the proton conducting electrolyte in contact with the same electrocatalyst reaction sites. With acidic electrolyte types the product of the anode reaction are protons and these can then be efficiently transported from the anode reaction sites through the electrolyte to the cathode layers. The cathode is also designed to be porous and to allow oxygen or air to enter the substrate and diffuse through to the electrocatalyst layer reaction sites. The cathode electrocatalyst combines the protons with oxygen to produce water. Product water then has to diffuse out of the cathode structure. The structure of the cathode has to be designed such that it enables the efficient removal of the product water. If water builds up in the cathode, it becomes more difficult for the reactant oxygen to diffuse to the reaction sites, and thus the performance of the fuel cell decreases. In the case of methanol fuelled PEMFCs, additional water is present due to the water contained in the methanol, which can be transported through the membrane from the anode to the cathode side. The increased quantity of water at the cathode requires removal. However, it is also the case with proton exchange membrane electrolytes, that if too much water is removed from the cathode structure, the membrane can dry out and the performance of the fuel cell also decreases.

[0005] The complete MEA can be constructed by several methods. The electrocatalyst layers can be bonded to one surface of the gas diffusion substrates to form what is known as a gas diffusion electrode, which can be either an anode or a cathode. The MEA is then formed by combining two gas diffusion electrodes with the solid proton-conducting polymer membrane. Alternatively, the MEA may be formed from two porous gas diffusion substrates and a solid proton-conducting polymer membrane which has been catalysed on both sides; or indeed the MEA may be formed from one gas diffusion electrode and one gas diffusion substrate and a solid proton-conducting polymer catalysed on the side facing


the gas diffusion substrate.

[0006] Electrodes, catalysed membranes or MEA's are employed in many different electrochemical devices in addition to fuel cells, including metal-air batteries, electrochemical gas sensors, and electrochemical reactors for the electrosynthesis of useful chemical compounds.

5 [0007] In most practical fuel cell systems, the hydrogen fuel is produced by converting a hydrocarbon-based fuel (such as methane) or an oxygenated hydrocarbon fuel (such as methanol) to hydrogen in a process known as reforming. This fuel, referred to as reformat, contains (in addition to hydrogen) high levels of carbon dioxide (CO₂), of around 25%, and small amounts of impurities such as carbon monoxide (CO), typically at levels of around 1%. For fuel cells operating at temperatures below 200°C, and especially for the PEMFC operating at temperatures around 100°C, it is well known that CO, even at levels of 1-10ppm, is a severe poison for the platinum electrocatalysts present in the electrodes. This leads to a significant reduction in fuel cell performance, ie the cell voltage at a given current density is reduced. This deleterious effect is more pronounced in PEMFCs operating at lower temperatures. In addition, it has been found that the CO₂ present in the fuel stream can also cause a loss of performance. This performance decay is usually small compared to the effect of CO.

15 [0008] Various methods have been employed to alleviate anode CO poisoning. For example, reformer technology has been redesigned to include an additional catalytic reactor, known as a preferential or selective oxidation reactor. This involves the injection of air or oxygen into the hydrogen-containing reactant gas stream, prior to it passing over the selective oxidation catalyst, to oxidise the CO to CO₂. This can reduce the levels of CO from 1-2% down to below 100ppm. However, even at these levels, the anode electrocatalyst in the PEMFC is still poisoned.

20 [0009] It has also been found that poisoning of the electrocatalyst by CO at levels of 1-100ppm can be reduced by the use of an oxygen or air bleed directly into the anode gas stream just before it enters the anode chamber of the fuel cell itself. This is described by Gottesfeld and Paiford in J. Electrochem. Soc., 135,2651 *et seq* (1988). This technique is believed to have the effect of oxidising the residual CO in the fuel to CO₂, the reaction being catalysed by electrocatalyst sites present in the anode:



25 [0010] This technique provides fuel cell performance that is much closer to the performance observed when no CO is present in the fuel stream. However, the air bleed technique does not usually improve the deleterious effects of CO₂ on performance and there are concerns over the long-term sustainability of the cell performance when this approach is employed. This is particularly the case if high levels of air bleed, equivalent to 4% and above of the total reformat fuel volume, are required.

30 [0011] However, the preferred technique for alleviating fuel cell performance reduction due to anode CO poisoning is to employ an anode electrocatalyst that is itself more poison-tolerant, but which still functions as a hydrogen oxidation catalyst in the presence of CO. As described by, for example, Niedrach *et al* in Electrochem. Technol., 5, 318, (1967), the use of a bimetallic anode electrocatalyst comprising platinum/ruthenium, rather than the more conventionally-used mono-metallic platinum-only electrocatalyst, shows a reduction in the poisoning effect of the CO at typical PEMFC operating temperatures. However, again, it was not possible fully to attain the performance observed on pure hydrogen, ie in the absence of CO in the fuel stream, by using this approach in isolation.

35 [0012] There have been a number of attempts to improve the performance of anode electrocatalysts operating in the presence of hydrogen fuels containing CO. These have taken the approach of modifying existing state-of-the-art catalysts, such as combining platinum/ruthenium with other components. In 1995, Chen *et al* (J. Electrochem. Soc., 142, (10)) discussed the need to develop CO-tolerant catalysts and studied the oxidation of impure H₂ on Teflon®-bonded carbon-supported platinum/ruthenium/ tungsten oxide electrodes. The use of tungsten oxide (WO₃) as a promoter of improved activity of platinum catalysts towards impure H₂ was not new. As far back as 1965, it was known that tungsten oxides were effective in promoting the electro-oxidation of CO on platinum-containing electrodes in acid-electrolyte fuel cells (Niedrach and Weinstock, Electrochem. Technol., 3, 270-5 (1965)). A more recent example of a catalyst having improved CO tolerance is given in European patent specification no. EPA 838 872.

40 [0013] EPA 838 872 relates to a ternary catalyst comprising Pt-M-Y, wherein Pt-M is an alloy of platinum and one or more metals selected from the transition metal elements or from Groups IIIA or IVA of the Periodic Table in "Handbook of Chemistry and Physics" 64th Edition, CRC Press, and Y is a bronze forming element or an oxide thereof, characterised in that the Pt-M alloy is in intimate contact with Y, and provided that M is not Ru if Y is WO₃.

45 [0014] However, such electrocatalysts aimed at improving CO tolerance apparently do not also have the effect of improving performance when CO₂ is present in the reformat fuel. Hence, for example, in the case of certain materials described in EPA 838 872, improved CO tolerance is observed, but at the same time the presence of CO₂ in the reformat stream causes larger performance losses than those observed with state-of-the-art alloys of platinum and ruthenium. This behaviour is most likely due to the CO tolerance mechanism for the catalysts described in EPA 838

872 differing from that observed with Pt/Ru alloys.

[0015] We have now surprisingly found that significant improvement in both CO and CO₂ tolerance can be achieved by providing an electrode structure in which the state-of-the-art Pt/Ru-type electrocatalyst is functionally linked with a further electrocatalyst. This has never before been achieved.

[0016] An anode structure of the present invention when used in a PEMFC shows improved tolerance to both CO and CO₂ poisons whilst maintaining high activity for the desired electrochemical reaction, and is therefore of use in fuel cells which use an impure feed. The anode structure may be of benefit in both phosphoric acid and solid polymer fuel cells. Specifically, it shows tolerance to both CO and CO₂ poisons in reformat fuel. The anode structure may also be of benefit in these fuel cells when the fuel is methanol.

[0017] Accordingly, the present invention provides an electrode structure, comprising a first catalytic component and a second catalytic component, characterised in that the first catalytic component comprises one or more electrocatalyst(s) of formula Pt-Y where Y is a bronze forming element, and optionally a third metal component X which is alloyed with the platinum, and the second catalytic component which comprises one or more electrocatalyst(s) of formula Pt-M, where M is a metal alloyed with the platinum.

[0018] The term "functionally linked" in the context of the present invention means that both materials are in ionic contact with each other. This may be achieved by adding an ion conducting material to each of the catalysts when they are formulated into the electrode structure of the invention. In the case of an anode structure for a PEMFC, the ion conducting material is a proton conducting material, which can be the same as that employed as the polymeric electrolyte membrane of the MEA.

[0019] The Pt-M or Pt-X alloy is preferably more than a mere physical mixture of Pt with metal(s), since the platinum and metal(s) are preferably heat-treated to promote a measurable interaction between the platinum and metal(s) to change the intrinsic properties of the platinum metal. Heat-treatment causes a significant number of atoms of the metal(s) to be incorporated into the atomic crystal lattice, or unit cell, of the platinum particle. This process usually distorts the dimensions of the platinum unit cell, since the atoms of the metal(s) will generally be of a different size from those of the platinum, and this can usually be measured by techniques such as X-ray diffraction. The characteristic dimensions of the platinum unit cell, referred to by crystallographers as the lattice parameter, can be shown to have altered due to the fact that two or more metals, with different atomic sizes, have been incorporated into a single, homogeneous metal alloy particle at the atomic level.

[0020] Preferably, the one or more metals(s) X or M, when present, is or are selected from the groups IVB, VB, VIB, VIIB, VIII, IB, IIB, IIIA or IVA of the Periodic Table in "Handbook of Chemistry and Physics" 64th Edition, CRC Press; for example, X metals can be from the group Ru, Rh, Ti, Cr, Mn, Fe, Co, Ni, Cu, V, Ga, Zr, Hf and Sn; especially Ru, Mn, Ti, Co, Ni and Rh and M metals can be from the same group especially Ru and Rh.

[0021] Component Y may either be alloyed with the Pt-X alloy (the resulting alloy being as defined hereinbefore) or may be unalloyed but in physical contact with the alloy.

[0022] Component Y may be a bronze-forming element or an oxide thereof. A 'bronze' material is defined by Wold and Dwight in Solid State Chemistry - Synthesis, Structure, and Properties of Selected Oxides and Sulfides, Chapman & Hall as " ... an oxide with intense colour (or black), having a metallic lustre and showing either semi-conducting or metallic behaviour. A principle characteristic of bronzes is their range of composition, which results in the transition metal exhibiting a variable formal valence." Suitable bronzes include non-stoichiometric alloys of the transition metal with hydrogen.

[0023] The component Y is suitably selected from one or more of the Group IVB to VIB elements and rhenium or an oxide thereof, for example Ti, V, Nb, Ta, Mo, W, Re, or an oxide thereof; suitably Ti, V, Ta, Mo, W, or an oxide thereof; preferably Mo or W, or an oxide thereof.

[0024] Preferably, the second catalytic component is one wherein the Pt-M is Pt (alone) or an alloy (as defined) of Pt/Ru.

[0025] The term "electrode structure" in the context of the present invention means the specific compositional aspects of those parts of the electrochemical cell at which the electrochemical reactions take place. It does not specifically refer to any particular physical embodiment of the invention. The physical embodiments of the invention can take several forms. The electrocatalyst materials can be applied to one side of a gas diffusion substrate material to produce an electrode, which can be either an anode or cathode, comprising the electrode structure of the invention.

[0026] Thus in a further aspect, the present invention provides an electrode comprising an electrode structure of the present invention wherein the electrocatalyst materials are present on one side of a gas diffusion substrate material.

[0027] Alternatively the electrocatalyst materials can be applied to one side of the polymer electrolyte membrane material to produce a catalysed membrane, comprising the electrode structure of the invention.

[0028] Thus in a further aspect the present invention provides a catalysed membrane comprising an electrode structure according to the present invention wherein the electrocatalyst materials are present on one side of the polymer electrolyte membrane material.

[0029] An MEA for use in, for example, a PEMFC, as herein described is a five layer unit, comprising a polymer

electrolyte membrane in the centre, with an electrocatalyst containing layer either side of the membrane and a gas diffusion substrate layer in contact with the electrocatalyst containing layers on the opposite face of the layer to that in contact with the membrane. An MEA comprising the electrode structure of the invention, can be formed from electrodes as defined above, by bonding two electrodes, at least one of which comprises the electrode structure of the invention, either side of a polymer electrolyte membrane. Alternatively the MEA may be formed from the catalysed membrane by applying gas diffusion substrate materials either side of a catalysed membrane, in which at least one catalysed side of the membrane comprises the electrode structure of the invention.

[0030] Thus in a further aspect, the present invention provides an MEA comprising an electrode structure according to the present invention.

[0031] In the above aspects of the present invention namely when formed into electrodes, catalysed membranes or an MEA from either of these two components, the two catalyst materials can be formulated into two separate layers which are applied to one side of either the gas diffusion substrate material or to the polymer electrolyte membrane, but in which they are still functionally linked. It is also possible that the two catalyst materials may be mixed together and formed into one layer containing both catalysts and applied to one side of either the gas diffusion substrate material or the polymer electrolyte membrane.

[0032] An electrode comprising the electrode structure of the invention may be formed wherein each catalyst is formulated into a separate layer in which a first layer comprising the first catalyst material, as herein defined, is in contact with one side of the gas diffusion substrate material, and a second layer comprising the second catalyst material is in contact with the opposite face of the first catalyst layer to that in contact with the gas diffusion substrate. Alternatively a catalysed membrane comprising the electrode structure of the invention may be formed wherein each catalyst is formulated into a separate layer in which a first layer comprising the second catalyst material, as herein defined, is in contact with one side of the polymer electrolyte membrane material, and the second layer comprising the first catalyst material is in contact with the opposite face of the second catalyst layer to that in contact with the polymer electrolyte membrane.

[0033] In a further aspect, the present invention provides a fuel cell an electrode structure, comprising a first catalytic component and a second catalytic component, characterised in that the first catalytic component comprises one or more electrocatalyst(s) of formula Pt-Y where Y is a bronze forming element, and optionally a third metal component X which is alloyed with the platinum, and the second catalytic component which comprises one or more electrocatalyst(s) of formula Pt-M, where M is a metal alloyed with the platinum.

[0034] In a final aspect, the present invention provides the use of an electrode structure according to the present invention in a fuel cell.

[0035] The invention will now be described further with reference to the following Examples and drawings in which:

Figure 1: shows fuel cell performance data of cell voltage vs time for operation of two PtRu (thick line and line with •), PtRuW (line with ■), PtTiW (line with ×) and PtCoMo (line with ▲) catalysts in a gas stream containing 100ppm CO in hydrogen. The anode platinum loadings are respectively 0.37, 0.25, 0.29, 0.45 and 0.29 mg Pt/cm².

Figure 2 : shows fuel cell performance data of cell voltage vs time for operation of the two PtRu (thick line and line with •), PtRuW (line with ■), PtTiW (line with ×) and PtCoMo (line with ▲) catalysts in a gas stream containing 25% CO₂ and 75% hydrogen. The anode platinum loadings are the same as in Figure 1.

Figure 3 presents single cell performance data for electrode bilayers according to the invention operating in 25% CO₂ and 75% hydrogen. The bilayers comprise of catalyst layers of PtTiW (line with ×), PtRuW (line with ■), PtCoMo (line with ▲) and PtCoW (dashed line) containing 0.16, 0.12, 0.26 and 0.27 mg Pt cm⁻² and layers of PtRu catalyst at loadings of 0.13, 0.25, 0.14 and 0.24 mg Pt cm⁻², respectively. Figure 3 also shows the comparative example PtRu (thick line) which is also presented in Figure 1.

Figure 4 shows that, at the same time, the performance of the bilayer electrodes of the invention in hydrogen containing 100 ppm CO is significantly improved over the comparative PtRu sample performance decay, while the total platinum loading in both layers is very similar in all cases.

Figure 5 shows the single cell performances of two MEA's, one an electrode bilayer according to the invention, and the other a single catalyst layer, operating on gas mixtures of CO and CO₂ in hydrogen, which has been used to simulate reformat gas compositions. The MEA's have been tested on two different gas mixtures; 40ppm CO and 25% CO₂ in hydrogen (closed symbols), and 100ppm CO and 25% CO₂ in hydrogen (open symbols). The bilayer comprises of a catalyst layer of PtCoMo at loadings of 0.15 mg Pt/cm² and a layer of a PtRu catalyst at a loading of 0.31 mg Pt/cm² (lines with squares). The single layer electrode comprised of the same PtRu catalyst at a loading of 0.29 mg Pt/cm² (lines with circles).

COMPARATIVE EXAMPLE 1

[0036] A catalyst containing platinum and ruthenium at 41.80 wt% Pt and 20.78wt% Ru supported on Cabot Vulcan XC72R carbon, was prepared using a process comprising the deposition of Pt onto the conductive carbon black substrate by the hydrolysis of an aqueous solution of chloroplatinic acid and ruthenium trichloride by a solution of sodium hydrogen carbonate in the presence of the carbon black, as disclosed in EP 450 849. The catalyst was reduced using aqueous formaldehyde solution, filtered, washed free of soluble chloride salts and dried at 100°C. X-ray diffraction analysis of the resulting catalyst showed a single cubic phase with a lattice parameter of 3.87X, indicating significant alloying of the Ru with the Pt. From this catalyst, a catalyst ink was prepared and a fuel cell anode was printed onto pre-tefflonated Toray TPG90 paper. Inks and electrodes are prepared as detailed in Example 2 of European patent specification no. EPA 731 520. The platinum loading of this electrode was 0.37mgPt/cm².

COMPARATIVE EXAMPLE 2

[0037] A catalyst containing platinum and ruthenium at 19.2 wt% Pt and 9.3 wt% Ru supported on Cabot Vulcan XC72R carbon, was prepared using the process as described in Comparative Example 1 and as disclosed in EP 450 849. X-ray diffraction analysis of the resulting catalyst showed a single cubic phase with a lattice parameter of 3.88X, indicating significant alloying of the Ru with the Pt. An Electrode was prepared in the same way as described in Comparative Example 1. The platinum loading of this electrode was 0.25mgPt/cm².

COMPARATIVE EXAMPLE 3

[0038] A catalyst containing platinum, ruthenium and tungsten at 16.65wt%Pt, 832wt%Ru and 10.77wt% W was prepared. A PtRu catalyst (75g), as described in Comparative Example 2, was slurried in 1 litre of demineralised water for one hour. A 1 wt% solution of sodium tungstate in demineralised water was prepared containing 1.98g tungsten. This solution was converted to tungstic acid by passing it through an exchange column, comprising Dowex 50-X8 ion-exchange resin, and fed directly into the slurry. The resultant catalyst was stirred overnight and then filtered, dried at 105°C in air and fired at 500°C in a gas mixture containing 6%CO in CO₂. X-ray diffraction analysis of the resulting catalyst showed a single cubic phase with a lattice parameter of 3.87X, indicating significant alloying of the Ru with the Pt, together with the presence of crystalline WO₃. An electrode containing this catalyst was prepared in the same way as described in Comparative Example 1. The platinum loading of this electrode was 0.29mgPt/cm².

COMPARATIVE EXAMPLE 4

[0039] A catalyst containing Pt, Ti and W at 34.41 wt% Pt, 2.02wt% Ti and 10.63wt% W was prepared. To a stirred suspension of Cabot Vulcan XC72R carbon (16g) in a 6 litre solution of potassium hydrogen carbonate (25g) under reflux, was added a 2wt% solution of chloroplatinic acid (containing 8g Pt). The resulting slurry was filtered, and washed with demineralised water until no chloride was detectable in the washings. The catalyst was dried at 100°C in air. The catalyst was re-slurried in a litre solution of potassium hydrogen carbonate (2.5g) and heated till under reflux. A 2wt% solution of titanium trichloride (containing 0.45g Ti) and urea (3.39g) was added dropwise. The ratio of alkali to metal salts for both steps was such as to ensure complete hydrolysis and precipitation of the metal hydrous oxides/hydroxides onto the carbon.

[0040] The slurry was filtered, and washed with demineralised water until no chloride was detectable in the washings. The wet cake was then dispersed in a litre of demineralised water. To this slurry was added dropwise a 1wt% solution of tungsten (2.32g) in water. This was prepared by the dissolution of tungsten powder in hydrogen peroxide solution, followed by decomposition of the excess peroxide by platinum black. The combined slurry was then evaporated to dryness. The resulting catalyst was then heated at 650°C in flowing 5% hydrogen in nitrogen for 1 hour. X-ray diffraction analysis of the resulting catalyst showed a single cubic phase with a lattice parameter of 3.93X, which indicated little alloying of the components. An electrode containing this catalyst was prepared in the same way as described in Comparative Example 1. The platinum loading of this electrode was 0.45mgPt/cm².

COMPARATIVE EXAMPLE 5

[0041] A catalyst containing Pt, Co and Mo at 21.0wt% Pt, 0.2wt% Co and 1.0wt% Mo was prepared. To a stirred suspension of Cabot Vulcan XC72R carbon (94.5g) in a 6 litre solution of sodium hydrogen carbonate (67.4g) under reflux, was added first a 2wt% solution of chloroplatinic acid (containing 24.2g Pt), followed by a 2wt% solution of cobalt dichloride (containing 1.7g Co). The amount of sodium hydrogen carbonate was calculated to be sufficient to just precipitate both Pt and Co as their hydrous oxides/hydroxides. The resulting catalyst was filtered, washed with dem-

5 10
 10
 15
 20
 25
 30
 35
 40
 45
 50
 55
 60
 65
 70
 75
 80
 85
 90
 95
 100
 105
 110
 115
 120
 125
 130
 135
 140
 145
 150
 155
 160
 165
 170
 175
 180
 185
 190
 195
 200
 205
 210
 215
 220
 225
 230
 235
 240
 245
 250
 255
 260
 265
 270
 275
 280
 285
 290
 295
 300
 305
 310
 315
 320
 325
 330
 335
 340
 345
 350
 355
 360
 365
 370
 375
 380
 385
 390
 395
 400
 405
 410
 415
 420
 425
 430
 435
 440
 445
 450
 455
 460
 465
 470
 475
 480
 485
 490
 495
 500
 505
 510
 515
 520
 525
 530
 535
 540
 545
 550
 555
 560
 565
 570
 575
 580
 585
 590
 595
 600
 605
 610
 615
 620
 625
 630
 635
 640
 645
 650
 655
 660
 665
 670
 675
 680
 685
 690
 695
 700
 705
 710
 715
 720
 725
 730
 735
 740
 745
 750
 755
 760
 765
 770
 775
 780
 785
 790
 795
 800
 805
 810
 815
 820
 825
 830
 835
 840
 845
 850
 855
 860
 865
 870
 875
 880
 885
 890
 895
 900
 905
 910
 915
 920
 925
 930
 935
 940
 945
 950
 955
 960
 965
 970
 975
 980
 985
 990
 995

neralised H₂O until chloride free and dried at 100°C. A portion of the dried catalyst (21.8g) was reslurried in 1.5 litres of demineralised H₂O and stirred. To this was added disodium molybdate dihydrate (1.7g) and the slurry stirred until complete dissolution. To the resulting slurry was added a solution of 1,8-hydroxyquinoline (1.0g) in 40 cm³ of ethanol. The amount of 1,8-hydroxyquinoline added being 2 molar equivalents of the amount of Mo added. The slurry was heated until under reflux and the pH adjusted to 4 by the addition of acetic acid. The slurry was boiled for 60 minutes to remove the ethanol, after which the slurry was cooled, filtered, washed free of salts and dried at 100°C. The dried catalyst was heat treated under flowing 10% H₂/N₂ for 1 hour at 650°C to decompose the 1,8-hydroxyquinoline. X-ray diffraction of resulting catalyst showed a single cubic phase with a lattice parameter of 3.91, which indicates little alloying of the components. An electrode containing this catalyst was prepared in the same way as described in Comparative Example 1. The platinum loading of this electrode was 0.29mgPt/cm².

COMPARATIVE EXAMPLE 6

[0042] A catalyst containing Pt and Ru at 38.7 wt%Pt and 20.7 wt%Ru supported on Cabot Vulcan XC72R carbon was prepared as described in Comparative Example 1. X-ray analysis of the resulting catalyst showed a single cubic phase with a lattice parameter of 3.90X, indicating significant alloying of the Ru with the Pt. An electrode containing this catalyst at a platinum loading of 0.29mgPt/cm² was prepared as described in Comparative Example 1.

EXAMPLE 1- (Pt/Mo/Co)/(Pt/Ru)

[0043] A catalyst containing Pt, Mo and Co at 20.30 wt%Pt, 1.44wt%Co and 0.65wt%Mo was prepared. To a stirred suspension of Cabot Vulcan XC72R carbon (30.2g) in a solution of sodium hydrogen carbonate (22.3g) under reflux, was added a 2wt% solution of chloroplatinic acid (containing 8g Pt) and cobalt dichloride (containing 0.6g Co). After refluxing for 2.5 hrs, the resulting slurry was filtered, and washed with demineralised water until no chloride was detectable in the washings. The catalyst was dried at 100°C in air. The dried catalyst was then re-dispersed in 1 litre of demineralised water for one hour at ambient temperature. To this slurry was added a solution of molybdenum (1.21g) prepared by passing a 1wt% solution of sodium molybdate through an ion exchange column containing Dowex 50-X8 ion exchange resin to convert to colloidal molybdic acid. The combined slurry was then evaporated to dryness. The resulting catalyst was then heated at 695°C in flowing 5% hydrogen in nitrogen to ensure reduction and alloying of the components. X-ray diffraction analysis of the resulting catalyst showed a single cubic phase with a lattice parameter of 3.87X, indicating significant alloying of the components.

[0044] An electrode containing the catalyst at a platinum loading of 0.26mgPt/cm² was prepared as described in Comparative Example 1. On top of this catalyst layer, an additional layer of PtRu catalyst made according to Comparative Example 1 was applied using the method described in Comparative Example 1. The additional Pt loading in this catalyst layer was 0.14mgPt/cm².

EXAMPLE 2 - (Pt/W/Co)/(Pt/Ru)

[0045] A catalyst containing Pt, W and Co at 14.7wt%Pt, 1.0wt%Co and 3.8wt% W was prepared. To a stirred suspension of Cabot Vulcan XC72R carbon (32g) in 6 litres of a solution of sodium hydrogen carbonate (18.5g) under reflux, was added a 2wt% solution of chloroplatinic acid (containing 5.7g Pt). The resulting slurry was heated under reflux for 2 hrs, before being filtered and washed with demineralised water, until no chloride was detected in the washings. The catalyst was then dried at 100°C in air. The dried catalyst was re-dispersed in 6 litres of sodium hydrogen carbonate (1.1g) solution and heated till under reflux. To this slurry was added a 2wt% solution of cobalt dichloride (containing 0.4g Co). The slurry was then filtered and washed with demineralised water until no chloride was detected in the washings. The wet cake was re-slurried in 1 litre of demineralised water for 1 hr at ambient temperature. To this was added was added a solution of tungsten (1.5g). The tungsten solution was prepared by dissolving tungsten powder in hydrogen peroxide (100 cm³ of 28wt% H₂O₂ solution), followed by decomposition of the excess peroxide by platinum black, and subsequent dilution to a 1wt% solution by demineralised water. The combined slurry was then evaporated to dryness. The resulting catalyst was then heated to 900°C in flowing nitrogen for 1 hour. X-ray diffraction analysis of the resulting catalyst showed a single cubic phase with a lattice parameter of 3.90X indicating significant alloying of the components.

[0046] An electrode containing this catalyst at a platinum loading of 0.27mgPt/cm² was prepared as described in Comparative Example 1. On top of this catalyst layer, an additional layer of a catalyst containing Pt and Ru at 37.1 wt%Pt and 17.9 wt%Ru supported on Cabot Vulcan XC72R carbon was prepared as described in Comparative Example 1, was applied using the method described in Comparative Example 1. The additional Pt loading in this catalyst layer was 0.24 mgPt/cm². X-ray analysis of this catalyst showed a single cubic phase with a lattice parameter of 3.90X, indicating significant alloying of the Ru with the Pt. An electrode containing this catalyst at a platinum loading of

0.29mgPt/cm² was prepared as described in Comparative Example 1.

EXAMPLE 3 - (Pt/Ru/W)/(Pt/Ru)

[0047] A catalyst containing Pt, Ru and W was prepared as described in Comparative Example 2. An electrode containing this catalyst at a platinum loading of 0.12mgPt/cm² was prepared as described in Comparative Example 1. On top of this catalyst layer, an additional layer of PtRu catalyst as used in Example 2 was applied using the method described in Comparative Example 1. The additional Pt loading in this catalyst layer was 0.25mgPt/cm².

EXAMPLE 4 - (Pt/Ti/W)/(Pt/Ru)

[0048] A catalyst containing Pt, Ti and W was prepared as described in Comparative Example 4. An electrode containing this catalyst at a platinum loading of 0.16mgPt/cm² was prepared as described in Comparative Example 1. On top of this catalyst layer, an additional layer of PtRu catalyst made according to Comparative Example 2 was applied using the method described in Comparative Example 1. The additional Pt loading in this catalyst layer was 0.13mgPt/cm².

EXAMPLE 5 - (PtMoCo)/(PtRu)

[0049] A catalyst containing Pt, Co and Mo was prepared as described in Comparative Example 5. An electrode containing this catalyst at a platinum loading of 0.15mgPt/cm² was prepared as described in Comparative Example 1. On top of this catalyst layer, an additional layer of PtRu catalyst made according to Comparative Example 6 was applied using the method described in Comparative Example 1. The addition loading in this catalyst layer was 0.31 mgPtcm⁻².

TABLE 1

Example Number	Catalyst	Assay Characterisation Data /wt% of total catalyst weight			Atomic Ratio	XRD Characterisation	
		Pt	2 nd Metal	3 rd Metal		Crystallite Size /nm	Pt lattice parameter /Å
Comp. 1	PtRu	41.80	20.78		51:49	2.6	3.87
Comp. 2	PtRu	19.2	9.3		52:48	1.9	3.88
Comp. 3	PtRuW	16.65	8.32	10.77	38:36:26	4.6	3.87
Comp. 4	PtTiW	34.41	2.02	10.63	64:15:21	5.6	3.93
Comp. 5	PtCoMo	21.9	0.2	1.0	89:03:08	4.5	3.91
Comp. 6	PtRu	38.7	20.7		49:51	2.7	3.90
1	PtCoMo	20.30	1.44	0.65	77:18:05	4.2	3.87
	PtRu	41.80	20.78		51:49	2.6	3.87
2	PtCoW	14.7	1.0	3.76	67:15:18	3.1	3.90
	PtRu	19.2	9.3		52:48	1.9	3.88
3	PtRuW	16.65	8.32	10.77	38:36:26	4.6	3.87
	PtRu	37.06	17.89		52:48	3.2	3.90
4	PtTiW	34.41	2.02	10.63	64:15:21	5.6	3.93
	PtRu	19.2	9.3		52:48	1.9	3.88
5	PtCoMo	21.9	0.2	1.0	89:03:08	4.5	3.91
	PtRu	38.7	20.7		49:51	2.7	3.90

EXAMPLE 6-PREPARATION OF MEAs

[0050] The electrode structures of the invention were first produced as anodes and then bonded to membranes to form MEAs, as described in Example 2 of EP 731 520. The MEA was fabricated by hot-pressing the anode and a pure platinum catalyst cathode (with a platinum loading of 0.6mg Pt/cm²) against each face of a solid proton-conducting electrolyte membrane. The membrane used was the perfluorinated membrane Nafion® 115 (from Du Pont de Nemours). MEAs of 6.5 cm² area were formed by hot-pressing at pressures of 100 psi (1 psi = 6.89 x 10³ N/m²) over the MEA, at temperatures exceeding the glass transition temperature of the membrane, as is commonly practised in the art. MEAs of 240 cm² area were formed by hot pressing at pressures of 400 psi over the MEA.

EXAMPLE 7-PERFORMANCE EVALUATION

[0051] The MEAs were evaluated in a PEMFC single cell. The single cell consists of graphite plates into which flowfields are machined to distribute the reactant gases, humidification water and heating and cooling water and to remove products. The MEA was located between the appropriate flowfield plates. The cell is compressed, typically to a gauge pressure of 70 psig above the reactant gas pressure.

[0052] The "fuel cell performance" was assessed by measuring the voltage at a fixed current density of 500 mA cm⁻². The fuel cell operated under conditions representative of those employed in practical PEM fuel cells. These conditions were typically a reactant gas inlet temperature of 80°C, a pressure of both hydrogen and air reactants of 3 atmospheres. For 6.45 cm² MEAs, the reactant gas streams were kept constant at 0.1SLPM (standard litres at 1 bar and 0°C per minute); 0.125 SLPM for 25% CO₂ and 75% hydrogen; and 0.4 SLPM for oxygen. For 240 cm² MEAs, the fuel to air gas stoichiometry was 1.5/2. For the single cell reformate tolerance experiments, the anode gas stream was changed at time t=0 from pure hydrogen to gas streams composed of 100ppm CO in hydrogen, 25% CO₂ in hydrogen, 40ppm CO and 25% CO₂ in hydrogen or 100ppm CO and 25% CO₂ in hydrogen. The fuel cell performance using the binary gas mixtures was performed using the 6.45 cm² MEAs, while testing using the ternary gas mixtures was performed using the 240 cm² MEAs. At constant current density of 0.5 Acm⁻², the cell potential was then monitored with time in order to assess the CO and the CO₂ tolerance of different catalysts under practical conditions. Table 2 summarises the CO, CO₂ and CO/CO₂ tolerances of the catalysts described in the Examples in the form of voltage losses (in mV) on the different poisoning gas streams, when compared to operation on pure hydrogen. The lower the voltage loss, the more resistant the catalyst or catalyst combination is towards being poisoned on that particular gas stream.

[0053] Figure 1 shows fuel cell performance data of cell voltage vs time for operation of two PtRu, PtRuW, PtTiW and PtCoMo catalysts in a gas stream containing 100ppm CO in hydrogen. The anode platinum loadings are respectively 0.37, 0.25, 0.29, 0.45 and 0.29 mg Pt/cm². Figure 1 shows that the single cell voltages for all five MEAs decay from their value at t=0 min when the cell is operated with pure hydrogen. Figure 1 shows that the performance curves of the two MEAs containing PtRu anode catalysts, one labelled "standard" PtRu and the other labelled "advanced" PtRu. This represents the range of CO tolerance performance found with state of the art PtRu catalysts as a function of Pt loading on the carbon and Pt loading in the catalyst layer. The MEA containing the advanced PtRu catalyst, shows the lowest drop in performance on switching between pure hydrogen and 100ppm CO in hydrogen. This catalyst has a higher Pt loading on carbon and a higher loading of catalyst in the electrode compared to the standard PtRu catalyst. The electrode containing the advanced PtRu catalyst would be expected to give a higher performance due to the higher density of Pt in the catalyst layer. The performance curves of the MEA's containing the three ternary catalysts, PtRuW, PtTiW and PtCoMo on 100ppm CO in hydrogen show them lying between the two PtRu performance curves, indicating comparable CO tolerance. Considering that the dispersion of the catalyst particles as shown in Table 1 as Pt crystallite size, are significantly inferior to those displayed by the two PtRu catalysts, then these catalysts are intrinsically more CO tolerant than state of the art PtRu catalysts, in terms of specific activity (ie activity per actual surface area of Pt present).

[0054] Figure 2 shows fuel cell performance data of cell voltage vs time for operation of the two PtRu, PtRuW, PtTiW and PtCoMo catalysts in a gas stream containing 25% CO₂ and 75% hydrogen. The anode platinum loadings are the same as in Figure 1. Figure 2 shows that the single cell voltages for all five MEAs decay from their value at t=0 min when the cell is operated with pure hydrogen. The performances of the electrodes containing the PtRu catalysts degrades by 19 and 38 mV respectively, on the introduction of the gas mixture containing 25% CO₂ and 75% hydrogen. In contrast, the performance of the electrodes containing the three ternary catalysts degrade by larger amounts, with the PtCoMo catalyst losing 211 mV on introduction of the CO₂/H₂ gas mixture. This shows that although the ternary catalysts have good CO tolerance, they have inferior CO₂ tolerance to the 'state-of-the-art' PtRu catalysts.

[0055] Figure 3 presents single cell performance data for electrode bilayers according to the invention operating in 25% CO₂ and 75% hydrogen. The bilayers comprise of catalyst layers of PtTiW, PtRuW, PtCoMo and PtCoW containing 0.16, 0.12, 0.26 and 0.27 mg Pt cm⁻² and layers of PtRu catalyst at loadings of 0.13, 0.25, 0.14 and 0.24 mg Pt cm⁻², respectively. Figure 3 also shows the comparative example PtRu which is also presented in Figure 1. The bilayer

electrodes according to the invention show small decays when the gas stream is changed at $t=0$ min from pure hydrogen to 25%CO₂ and 75% hydrogen. The performance decay of the PtRuW catalyst when as a bilayer with PtRu shows a significant reduction. The other electrode samples exhibit a decay around 25 mV, very close to the comparative PtRu electrode. Therefore, the combination of Pt ternary catalysts with PtRu catalysts, has overcome the CO₂ "in-tolerance" of these catalyst seen, when tested as single catalyst layers.

[0056] Figure 4 shows that, at the same time, the performance of the bilayer electrodes of the invention in hydrogen containing 100 ppm CO is significantly improved over the comparative PtRu sample. When at $t=0$ min the gas stream is changed from pure hydrogen to hydrogen containing 100 ppm CO, all samples exhibit, after some induction time, a decay of the single cell voltage. This decay is 166 mV for the comparative PtRu sample. All bilayer samples show lower performance decay, while the total platinum loading in both layers is very similar in all cases. The PtCoMo/PtRu bilayer electrode of the invention shows a performance decay as low as approximately 88 mV. In addition, the PtCoW/PtRu bilayer electrode of the invention shows a performance decay of 73 mV, although with a higher overall electrode loading of 0.51 mg Pt/cm².

[0057] Figure 5 shows the single cell performances of two MEA's, one an electrode bilayer according to the invention, and the other a single catalyst layer, operating on gas mixtures of CO and CO₂ in hydrogen, which has been used to simulate reformat gas compositions. The MEA's have been tested on two different gas mixtures; 40ppm CO and 25% CO₂ in hydrogen, and 100ppm CO and 25% CO₂ in hydrogen. The bilayer comprises of a catalyst layer of PtCoMo at loadings of 0.15 mg Pt/cm² and a layer of a PtRu catalyst at a loading of 0.31 mg Pt/cm². The single layer electrode comprised of the same PtRu catalyst at a loading of 0.29 mg Pt/cm². Figure 5 shows that the performance of the bilayer electrode is superior to the single layer with both the gas mixtures tested. In particular, the differences between the two electrodes is increased with the gas mixture with 100ppm CO.

[0058] Clearly, the bilayer electrode according to the invention shows improved performance when tested in gas streams of CO in hydrogen, CO₂ in hydrogen and mixtures of CO and CO₂ in hydrogen, when compared to single layer electrodes of similar Pt loading. In particular, the combination of two different catalysts within the bilayer electrode have shown unexpectedly improved performances based on their performances as single layers.

TABLE 2

Example	Catalyst(s)	Pt loading /mgPtcm ⁻²	Voltage Losses on Different Poisoning Gas Streams /mV			
			100ppmCO /H ₂	25%CO ₂ /H ₂	40ppmCO/ 25%CO ₂ /H ₂	100ppmCO/ 25%CO ₂ /H ₂
Comp.1	PtRu	0.37	166	19	-	-
Comp.2	PtRu	0.25	325	38	-	-
Comp.3	PtRuW	0.29	177	56	-	-
Comp.4	PtTiW	0.45	195	51	-	-
Comp.5	PtCoMo	0.29	274	211	-	-
Comp.6	PtRu	0.29	-	-	114	173
1	PtCoMo/PtRu	0.26/0.14	88	29	-	-
2	PtCoW/PtRu	0.27/0.24	73	22	-	-
3	PtRuW/PtRu	0.12/0.25	110	44	-	-
4	PtTiW/PtRu	0.16/0.13	165	29	-	-
5	PtCoMo/PtRu	0.15/0.31	-	-	61	83

Claims

1. An electrode structure comprising a first catalytic component and a second catalytic component, wherein:

- (a) said first catalytic component comprises one or more electrocatalyst(s) of formula Pt-Y, wherein Y is Mo, W or an oxide of Mo or W, and optionally a third metal component X which is alloyed with the platinum and which is one or metals selected from the group Ru, Rh, Ti, Cr, Mn, Fe, Co, Ni, Cu, Ga, Zr, Hf and Sn; and
- (b) said second catalytic component comprises one or more electrocatalyst(s) of formula Pt-M, where M is a

metal alloyed with the platinum and is one or more metals selected from the group Ru, Rh, Ti, Cr, Mn, Fe, Co, Ni, Cu, Ga, Zr, Hf and Sn; and

wherein the first and second catalytic components are in ionic contact with each other.

5

2. An electrode structure according to claim 1 wherein X is selected from Ru, Mn, Co, Ni, Rh and Ni.
3. An electrode structure according to claim 1 or claim 2, wherein M is selected from Ru or Rh.
- 10 4. An electrode structure according to claim 1, wherein the first catalytic component is selected from: Pt/Mo, Pt/Mo/Co, Pt/W/Co, Pt/Ru/WO₃ and Pt/Ti/W; and the second catalytic component is Pt/Ru.
5. An electrode comprising an electrode structure according to any preceding claim wherein the electrocatalyst materials are present on one side of a gas diffusion material.
- 15 6. A catalysed membrane comprising an electrode structure according to any one or more of claims 1 to 4 wherein the electrocatalyst materials are present on one side of the polymer electrolyte membrane material.
7. An MEA comprising an electrode structure according to any one or more of claims 1 to 4.
- 20 8. An electrode according to claim 5, a catalysed membrane according to claim 6 or an MEA according to claim 7 wherein the two catalyst materials are formulated into two separate layers.
9. An electrode according to claim 5, a catalysed membrane according to claim 6 or an MEA according to claim 7 wherein the two catalyst materials are formulated into one mixed layer.
- 25 10. A fuel cell comprising an electrode structure according to any one or more of claims 1 to 4.
11. Use of an electrode structure according to any one or more of claims 1 to 4 in a fuel cell.

30

Patentansprüche

35

1. Elektrodenstruktur, die umfasst eine erste katalytische Komponente und eine zweite katalytische Komponente, wobei

40

(a) die genannte erste katalytische Komponente einen oder mehrere Elektrokatalysatoren der Formel Pt-Y, worin Y für Mo, W oder ein Oxid von Mo oder W steht, und gegebenenfalls eine dritte Metallkomponente X umfasst, die mit dem Platin legiert ist und bei der es sich um ein oder mehrere Metalle, ausgewählt aus der Gruppe Ru, Rh, Ti, Cr, Mn, Fe, Co, Ni, Cu, Ga, Zr, Hf und Sn, handelt; und

(b) die genannte zweite katalytische Komponente umfasst einen oder mehrere Elektrokatalysatoren der Formel Pt-M, worin M für ein mit dem Platin legiertes Metall steht, bei dem es sich um ein oder mehrere Metalle, ausgewählt aus der Gruppe Ru, Rh, Ti, Cr, Mn, Fe, Co, Ni, Cu, Ga, Zr, Hf und Sn, handelt; und

45

wobei die erste katalytische Komponente und die zweite katalytische Komponente in ionischem Kontakt miteinander stehen.

50

2. Elektrodenstruktur nach Anspruch 1, worin X ausgewählt ist aus Ru, Mn, Co, Ni, Rh und Ni.
3. Elektrodenstruktur nach Anspruch 1 oder 2, worin M ausgewählt ist aus Ru oder Rh.
4. Elektrodenstruktur nach Anspruch 1, worin die erste katalytische Komponente ausgewählt ist aus Pt/Mo, Pt/Mo/Co, Pt/W/Co, Pt/Ru/WO₃ und Pt/Ti/W, und die zweite katalytische Komponente Pt/Ru ist.
- 55 5. Elektrode, die eine Elektrodenstruktur nach einem der vorhergehenden Ansprüche umfasst, worin die Elektrokatalysator-Materialien auf einer Seite eines Gasdiffusionsmaterials vorliegen.
6. Membran mit Katalysator, die umfasst eine Elektrodenstruktur nach einem oder mehreren der Ansprüche 1 bis 4,

worin die Elektrokatalysator-Materialien auf einer Seite des Polymer-Elektrolyt-Membranmaterials vorliegen.

7. MEA, die eine Elektrodenstruktur nach einem oder mehreren der Ansprüche 1 bis 4 umfasst.
- 5 8. Elektrode nach Anspruch 5, Membran mit Katalysator nach Anspruch 6 oder MEA nach Anspruch 7, worin die beiden Katalysatormaterialien zu zwei getrennten Schichten formuliert sind.
9. Elektrode nach Anspruch 5, Membran mit Katalysator nach Anspruch 6 oder MEA nach Anspruch 7, worin die beiden Katalysatormaterialien zu einer gemischten Schicht formuliert sind.
- 10 10. Brennstoffzelle, die eine Elektrodenstruktur nach einem oder mehreren der Ansprüche 1 bis 4 umfasst.
11. Verwendung einer Elektrodenstruktur nach einem oder mehreren der Ansprüche 1 bis 4 in einer Brennstoffzelle.

15

Revendications

1. Structure d'électrode comprenant un premier composant catalytique et un second composant catalytique, dans laquelle :
20 (a) ledit premier composant catalytique comprend un ou plusieurs électrocatalyseurs de formule Pt-Y, dans laquelle Y est le Mo, le W ou un oxyde du Mo ou du W, et éventuellement un troisième composant métal X qui est allié au platine et qui est un ou plusieurs métaux choisis dans le groupe comprenant Ru, Rh, Ti, Cr, Mn, Fe, Co, Ni, Cu, Ga, Zr, Hf et Sn ; et
25 (b) ledit second composant catalytique comprend un ou plusieurs électrocatalyseurs de formule Pt-M, dans laquelle M est un métal allié au platine et est un ou plusieurs métaux choisis dans le groupe comprenant Ru, Rh, Ti, Cr, Mn, Fe, Co, Ni, Cu, Ga, Zr, Hf et Sn ; et dans laquelle les premier et second composants catalytiques sont en contact ionique l'un avec l'autre.
- 30 2. Structure d'électrode selon la revendication 1, dans laquelle X est choisi parmi Ru, Mn, Co, Ni, Rh et Ni.
3. Structure d'électrode selon la revendication 1 ou la revendication 2, dans laquelle M est choisi entre Ru ou Rh.
4. Structure d'électrode selon la revendication 1, dans laquelle le premier composant catalytique est choisi parmi :
35 Pt/Mo, Pt/Mo/Co, Pt/W/Co, Pt/Ru/WO₃ et Pt/Ti/W et le second composant catalytique est Pt/Ru.
5. Electrode comprenant une structure d'électrode selon l'une quelconque des revendications précédentes, dans laquelle les matériaux d'électrocatalyseurs sont présents sur une face d'un matériau de diffusion gazeuse.
- 40 6. Membrane catalysée comprenant une structure d'électrode selon l'une quelconque ou plusieurs des revendications 1 à 4, dans laquelle les matériaux d'électrocatalyseurs sont présents sur une face du matériau de membrane électrolyte polymère.
7. MEA comprenant une structure d'électrode selon l'une quelconque ou plusieurs des revendications 1 à 4.
- 45 8. Electrode selon la revendication 5, membrane catalysée selon la revendication 6 ou MEA selon la revendication 7, dans lesquelles les deux matériaux de catalyseurs sont formulés en deux couches séparées.
9. Electrode selon la revendication 5, membrane catalysée selon la revendication 6 ou MEA selon la revendication 7, dans lesquelles les deux matériaux de catalyseurs sont formulés en une couche mixte.
- 50 10. Pile à combustible comprenant une structure d'électrode selon l'une quelconque ou plusieurs des revendications 1 à 4.
- 55 11. Utilisation d'une structure d'électrode selon l'une quelconque ou plusieurs des revendications 1 à 4 dans une pile à combustible.

FIGURE 1

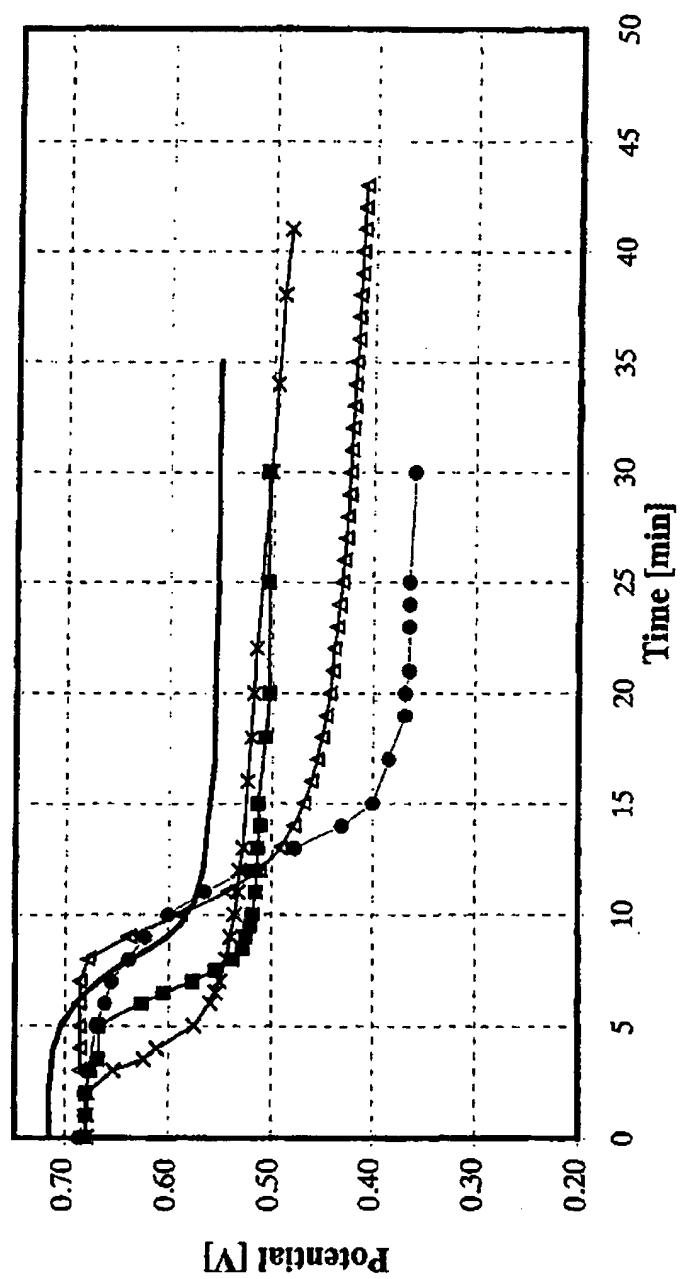


FIGURE 2

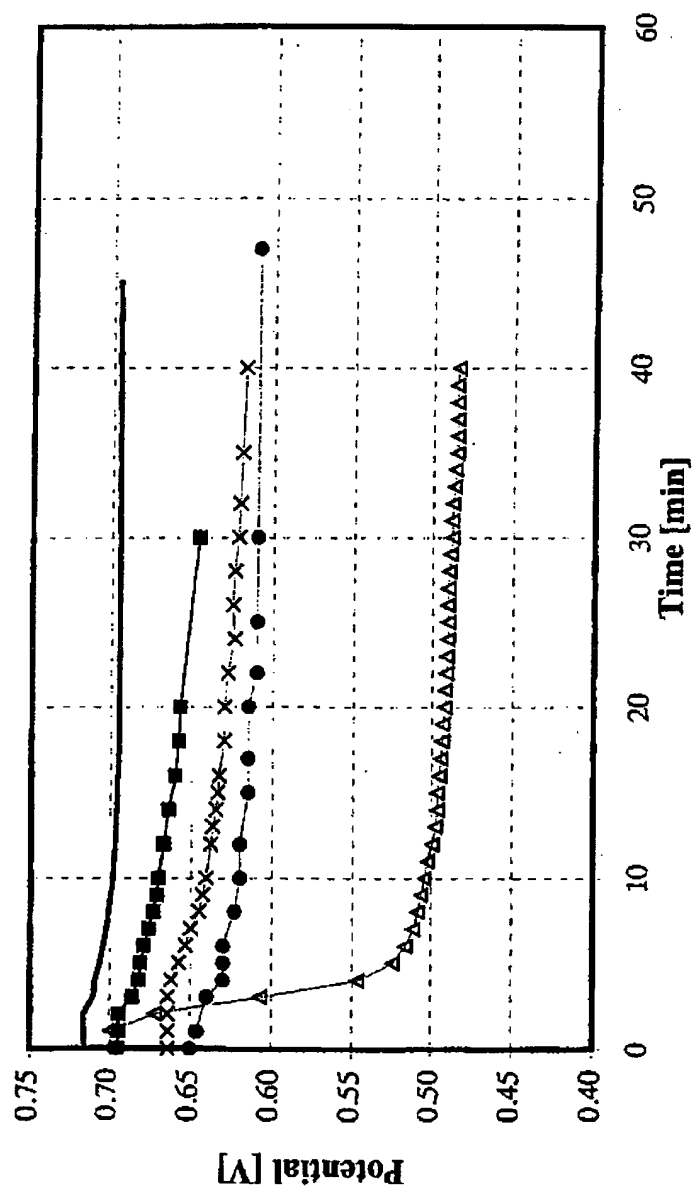


FIGURE 3

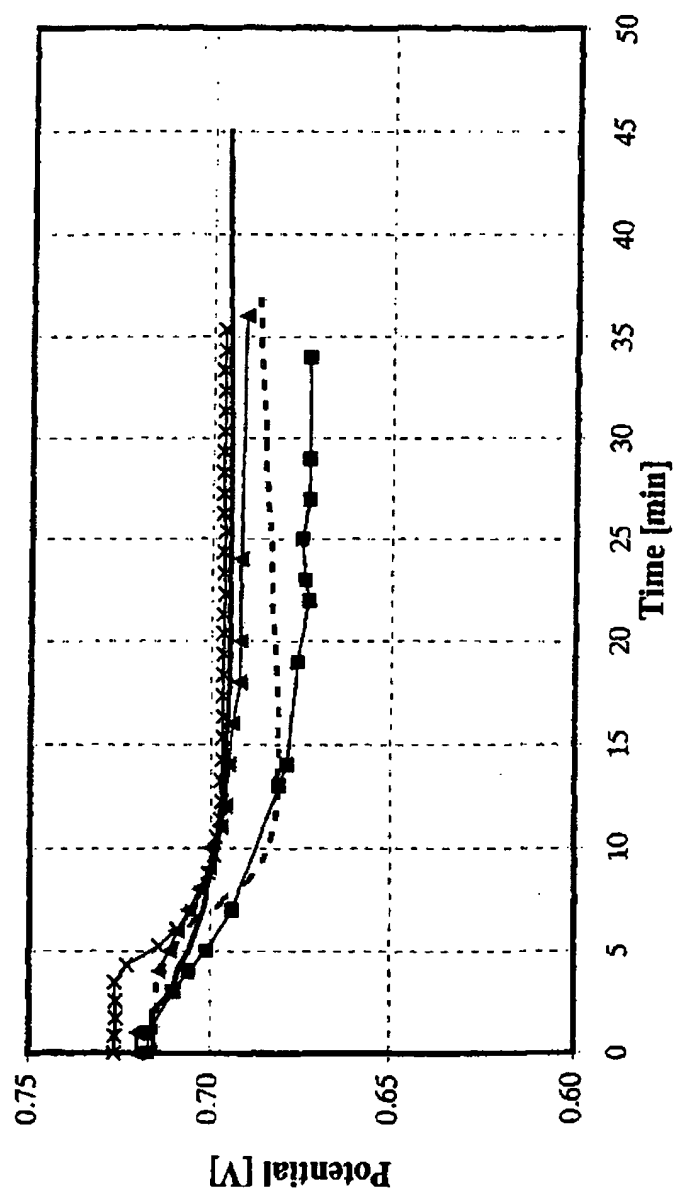


FIGURE 4

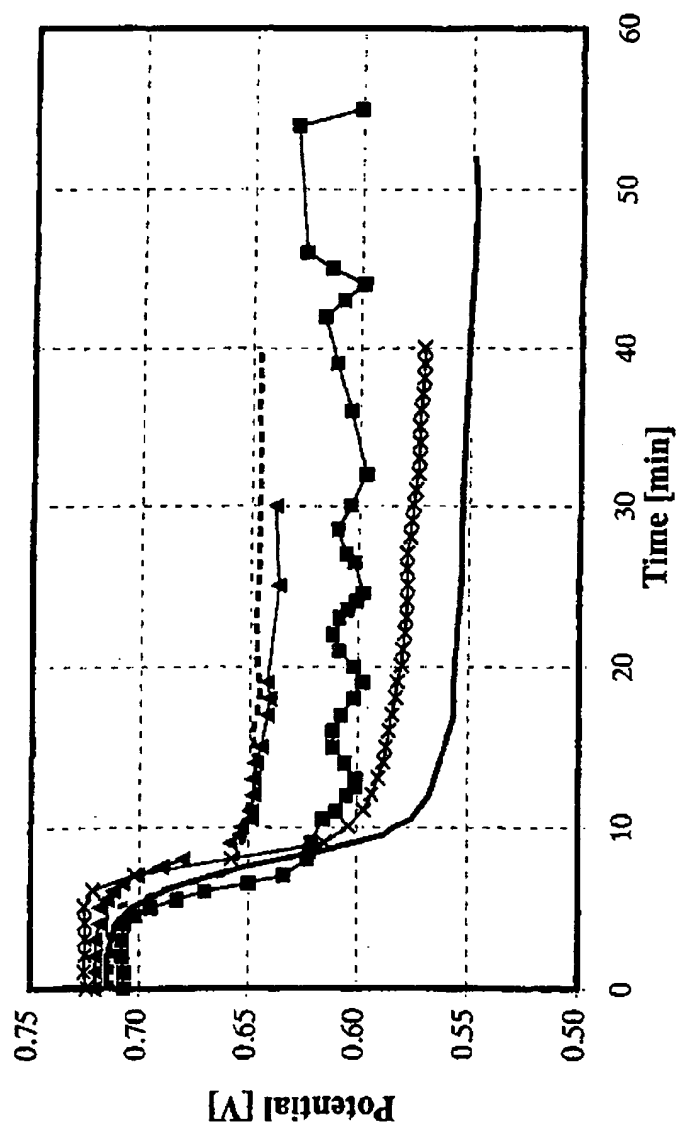


FIGURE 5

